


PJS-BORA

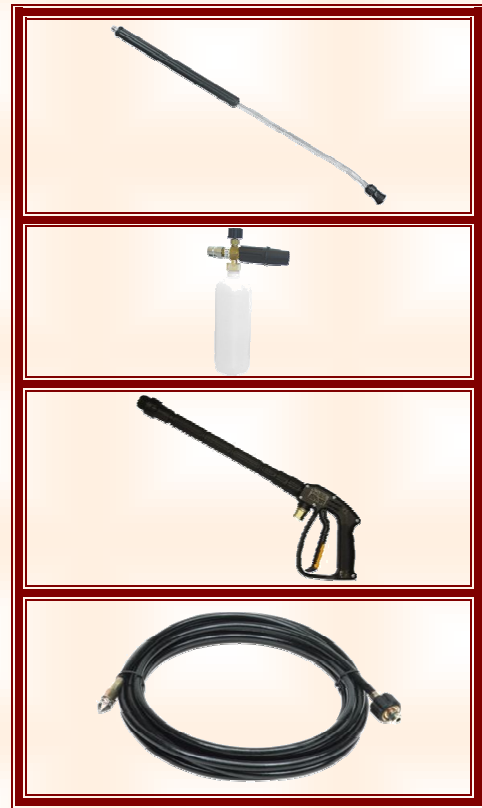

GENERAL FEATURES

- Three-pistons axial pump, flanged directly to the electric motor
- Brass or aluminium manifold
- Convenient storage for gun and lance
- Built-in fuel with lamp level
- **EASY-START** device motor guaranteed to start in all electrical conditions
- Direct feed to water pump
- **TOTAL STOP**
- Detergent with foam lance

CONTROL PANEL

- Switch 0 - 1 - 2 (stop-cold water-hot water)
- Motor pump thermal protector

BOILER FEATURES

- Double coil vertical boiler
- High thermal efficiency
- Delayed burner start
- Safety valve
- Boiler thermal protector

ACCESSORIES

- Drain Nozzle
- Sandblasting Lance
- adjustable Lance
- Twin Lance
- Lance with Rotating Nozzle
- Ionic Anti-scale device

TECHNICAL DATA

Model	Max flow rate (LPH)	Max Pressure (BAR)	Voltage	Absorbed power (HP)	RPM	Weight (KG)	Dimensions (LXBXH) cm
PJS-B-8.130	450	130	230 V (50 HZ)	3	2800	55	68X50X80
PJS-B-8.120	450	120		3			

PressureJet Systems Pvt. Ltd.

62/13, Phase-1, G.I.D.C., Vatva, Ahmedabad-382 445. Gujarat, India.
Phone: +91-079-25835598/25830762/25893868, Fax: +91-079-25897220.
Email: sales@pressurejet.com URL: www.pressurejet.com